

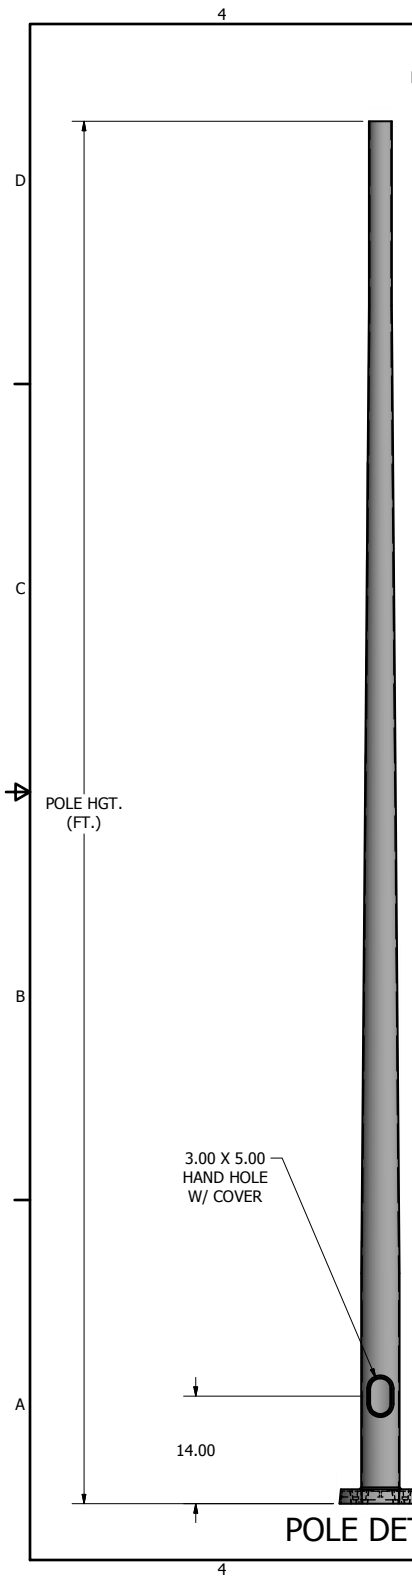


DRILLED MOUNTING OPTIONS

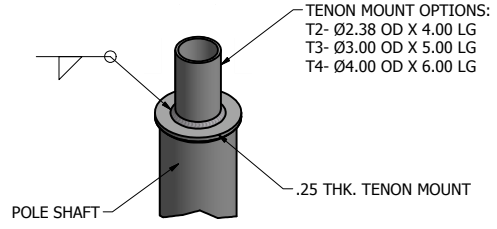


TENON MOUNT OPTIONS

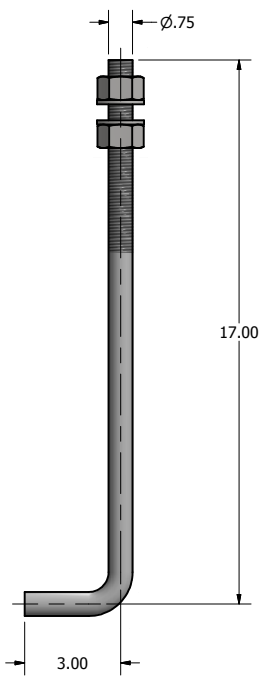


Ø.75 X 20.00 ANCHOR BOLT

POLE SPECIFICATIONS				
NO.	COMPONENT		MAT'L DESIGNATION	
1.	POLE SHAFT		6063-T6	
2.	BASE PLATE		A356-T6	
3.	ANCHOR BOLTS		F1554 GR. 55	
4.	GALVANIZED HARDWARE		A153	
FINISH SPECIFICATIONS				
POLES SHALL HAVE A POLYESTER POWDER COAT FINISH IN A STANDARD COLOR.				
POLE DIMENSIONS				
POLE HGT (FT.)	TOP DIA. (IN.)	BOTTOM DIA. (IN.)	GAGE	MTG. HGT. (FT.)
20'	3.00	5.00	.156	20'
BASE PLATE DIMENSIONS				
BOLT CIRCLE (IN.)	BASE PLATE DIM. (IN.)		BOLT HOLE (IN.)	PLATE THK. (IN.)
7.75	10.62		.88	.75
ANCHOR BOLT DIMENSIONS				
ANCHOR BOLT DIA. (IN.)		ANCHOR BOLT LENGTH (IN.)		
.75		20.00		
ALLOWABLE WIND LOADING (SQ. FT.)				
WIND*	80 MPH	90 MPH	100 MPH	120 MPH
EPA	6.2	4.3	3.0	1.0

*WITH 1.3 GUST FACTOR



3.00 X 5.00 HAND HOLE COVER

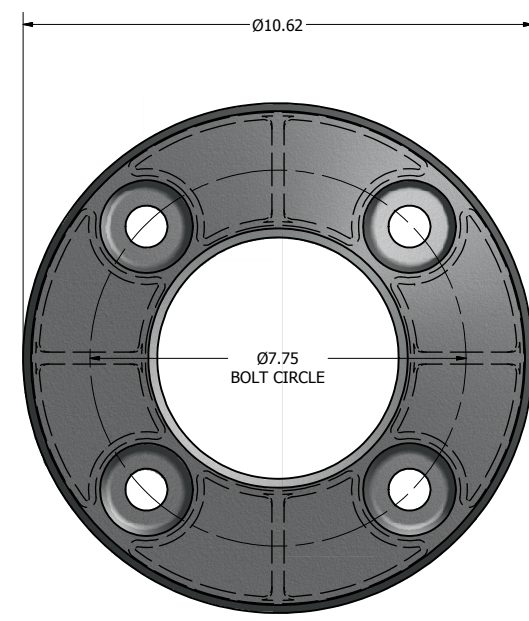

Ø10.62 X 1.88 THK. BASE CASTING

SOME GEOGRAPHICAL AREAS HAVE SPECIAL WIND CONDITIONS THAT CAN CREATE WIND INDUCED VIBRATIONS CAUSING A FATIGUE PROBLEM. NO METHOD HAS YET BEEN FOUND FOR PREVENTING OR MINIMIZING VIBRATION PROBLEMS. THEREFORE, THE COMPANY MAKING THESE PRODUCTS CANNOT BE GUARANTEED AGAINST, AND ARE THE RESPONSIBILITY OF A LOCAL SITE ENGINEER.

TITLE:

CATALOG:

DWG NO: **ALS-ARDT-53202-AB**

SHEET 1 OF 1

15841 Old US Highway 441
Tavares, Florida 32778
(321) 203-4869
sales@americanlightingsystems.com
AmericanLightingSystems.com

AMERICAN LIGHTING SYSTEMS

DRAWN: M. HARVALA 2/18/2015

CHECKED	DATE:
REVISION:	
APPROVED:	
QUOTE:	
S.O.#	
REF:	SCALE: NONE

180°
270° 0° 90°
HANDHOLE