



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Color & Power SELECTABLE LED BOLLARD LIGHT 24/15/12 WATTS

The ALS-BLA series is constructed with a die-cast aluminum housing and weather-resistant powder-coated finish, the BLA series ensures durability and reliability in harsh outdoor conditions, from urban settings to extreme climates. With integrated energy-efficient LEDs, the ALS-BLA series outperforms traditional lighting, delivering greater efficiency and reliability, reducing maintenance and operating costs for long-term outdoor lighting projects.

Bollard lighting provides dependable ground-level illumination that improves visibility and enhances security along walkways, entrances, and landscaped areas.

A modern, minimalist bollard defined by clean lines and a refined silhouette. Its understated form complements contemporary architecture while maintaining a strong visual presence without excess detail.



Ordering Information

Example: ALS-BLA-24/15/12W-42-C-3/4/5K-BK

MODEL	Wattage	Finish
ALS-BLA	24/15/12W-42-C-3/4/5K	BZ - Bronze BK - Black

OPTIONS BELOW - FROM PAGE 3

ALS-X180DGS - 180 Degree Glare Shield
ALS-XLOV - Louver
ALS-XDL - Diffuser Lens

BZ - Bronze
BK - Black



Job Name: _____

Type: _____

Part #: _____

Notes: _____

General Specifications

Construction:

- ◆ A die-cast aluminum housing. Powder coat corrosion resistant finish.

Optics:

- ◆ CCT Selectable 3000K or 4000K or 5000K (Default setting).
- ◆ Type V distribution type
- ◆ Optional Louver, Glare Shield or Diffuse Lens

Electrical:

- ◆ 0-10V dimmable driver, the dimming wire does not lead out from the fixture.
- ◆ Input voltage 120-277V

Finish:

- ◆ Dark Bronze color is standard. Black color is available.

Mounting:

- ◆ Three (3) anchor bolts provided for concrete pad mounting.

Ambient Temperature:

- ◆ -40°F (-40°C) to 122°F (50°C)

Compliances:

- ◆ cULus listed for wet locations.
- ◆ DLC® (DesignLights Consortium) Qualified-DLC Standard (T3 Dist.) & DLC Premium (T5 Dist.). Please refer to the DLC website for specific product qualifications at www.designlights.org.


Warranty:

- ◆ 5-year limited warranty.

Applications



Dimensions

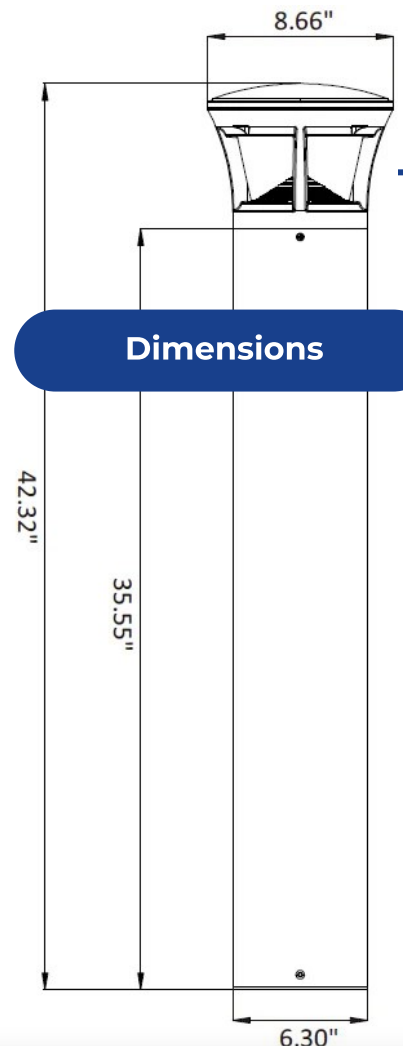



Job Name: _____

Type: _____


Part #: _____

Notes: _____




IN THE BOX

Mounting Anchor Bolts



Easy Color & Wattage Select

ANCHOR BOLT INSTALL

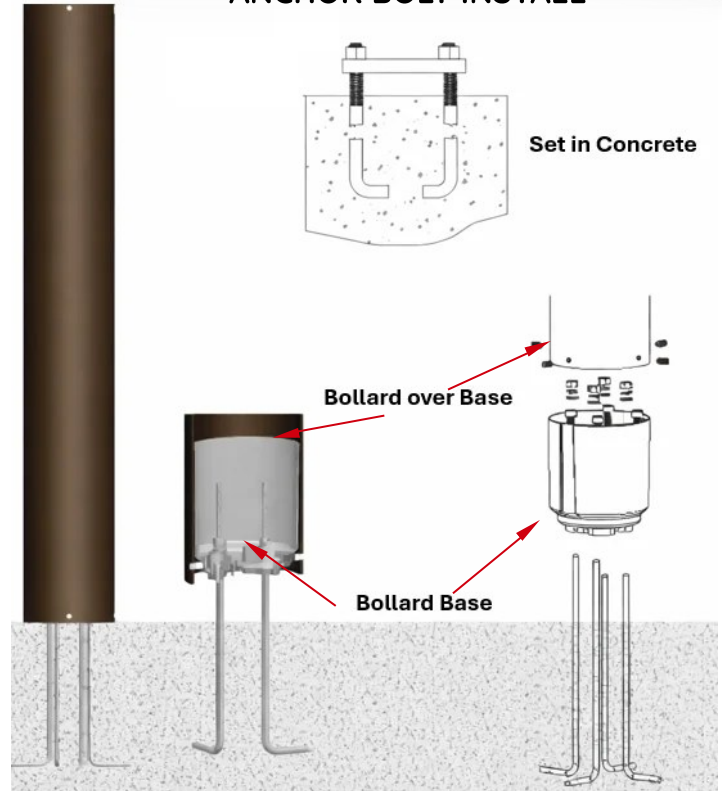

OPTIONS



ALS-X180DGS - 180 Degree Glare Shield



ALS-XLOV - Louvers



ALS-XDL - Diffuser Lens