



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# Color & Power **SELECTABLE** LED ROUND CANOPY LIGHT

**60/80/100 WATTS**  
with optional **MOTION SENSOR**

The ALS-CPG-60/80/100W-3/4/5K-RD is a slim-profile, high-efficacy round LED canopy fixture engineered for parking garages, carports, driveways, underpasses, and commercial canopies. Field-selectable switches allow you to set the fixture to 60W, 80W, or 100W and select 3500K, 4000K, or 5000K color temperature—streamlining inventory and maximizing flexibility for both new construction and retrofit projects.

At its highest setting, the 100W mode delivers up to 13,000 lumens (135 lm/W), making this fixture a robust LED replacement for up to 325W metal halide canopy lights. The die-cast aluminum housing with a bronze powder coat finish ensures long-term durability and excellent heat dissipation, while the lightweight, low-profile design allows for fast, hands-free installation.

The fixture can be surface mounted directly to the ceiling or pendant mounted using rigid conduit. The professional reflector design provides a wide 140° beam angle with high light transmission and uniform distribution. The fixture supports 0–10V dimming and is motion sensor ready with an easy, plug-and-play sensor port (sensor and emergency driver sold separately).



Optional Easy plug-and-play Motion Sensor

## Ordering Information

Example: ALS-CPG-60/80/100-3/4/5K-RD-BZ

MODEL	Wattage	Finish
ALS-CPG	60/80/100-3/4/5K-RD	BZ - Bronze WH - White



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_


Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

### General Specifications

<b>Lumens per Watt</b>	130 Lm/w	<b>Total Lumens</b>	7800-13000 Lm
<b>AC Input</b>	AC 120-277V	<b>Housing Material</b>	Die-Cast Aluminum
<b>Finish</b>	Bronze or White	<b>Lens Type</b>	Poly Carbonate
<b>Dimming</b>	0-10V Dimmable	<b>LED Chips</b>	Lumileds
<b>Color Temperature</b>	3000K, 4000K, 5000K	<b>Certifications</b>	UL, DLC
<b>CRI</b>	≥70	<b>IP Rating</b>	65
<b>Weight</b>	8 Lbs	<b>Dimensions</b>	11.41"x11.41"x3.4"
<b>Luminary Life</b>	50,000 Hour Rated	<b>Warranty</b>	5 Years

### Dimensions

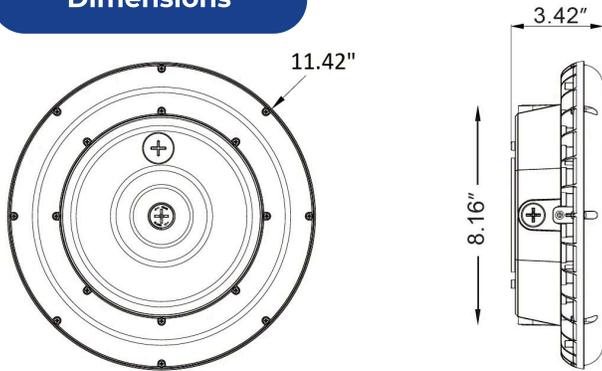

### Color & Wattage Select



### Applications

