



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Color & Power **SELECTABLE** LED SQUARE CANOPY LIGHT

60/80/100 WATTS
with optional **MOTION SENSOR**

The ALS-CPG-60/80/100W-3/4/5K-SQ is a slim-profile, high-efficacy square LED canopy fixture engineered for parking garages, carports, driveways, underpasses, and commercial canopies.

Field-selectable switches allow you to set the fixture to 60W, 80W, or 100W and select 3500K, 4000K, or 5000K color temperature—streamlining inventory and maximizing flexibility for both new construction and retrofit projects. At its highest setting, the 100W mode delivers up to 13,000 lumens (135 lm/W), making this fixture a robust LED replacement for up to 325W metal halide canopy lights. The die-cast aluminum housing with a bronze or white powder coat finish ensures long-term durability and excellent heat dissipation, while the lightweight, low-profile design allows for fast, hands-free installation.

The fixture can be surface mounted directly to the ceiling or pendant mounted using rigid conduit. The professional reflector design provides a wide 140° beam angle with high light transmission and uniform distribution. The fixture supports 0–10V dimming and is motion sensor ready with an easy, plug-and-play sensor port (sensor and emergency driver sold separately).



Ordering Information

Example: ALS-CPG-60/80/100-3/4/5K-SQ-BZ

MODEL	Wattage	Finish
ALS-CPG	60/80/100-3/4/5K-SQ	BZ - Bronze WH - White



Job Name: _____

Type: _____


Part #: _____

Notes: _____

General Specifications

Lumens per Watt	130 Lm/w	Total Lumens	7800-13000 Lm
AC Input	AC 120-277V	Housing Material	Die-Cast Aluminum
Finish	Bronze or White	Lens Type	Poly Carbonate
Dimming	0-10V Dimmable	LED Chips	Lumileds
Color Temperature	3000K, 4000K, 5000K	Certifications	UL, DLC
CRI	≥70	IP Rating	65
Weight	8 Lbs	Dimensions	10.06"x10.06"x2.73"
Luminary Life	50,000 Hour Rated	Warranty	5 Years

Dimensions

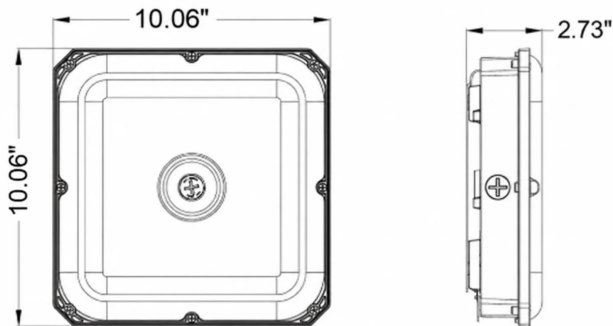

Color & Wattage Select



Applications

