



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Color & Power **SELECTABLE**


DUSK TO DAWN AREA LIGHT

35/50/65 WATTS
with **PHOTOCELL**

The ALS-DTD-35/50/65W-3/4/5K-BZ is a robust, field-selectable LED dusk-to-dawn fixture designed for area, security, and general site lighting. With onboard switches, you can set the fixture to 35W, 50W, or 65W and select 3000K, 4000K, or 5000K color temperature—giving you maximum flexibility for both new installations and retrofits. At its highest setting, the 65W mode delivers up to 8,450 lumens (130 lm/W), making it a reliable LED replacement for 175–250W HID dusk-to-dawn fixtures. The fixture features a rugged bronze-finished housing for durability and a low-profile, modern appearance. The integrated SMD2835 LED chips ensure high efficacy and long lifespan. A built-in photocell provides automatic dusk-to-dawn operation, eliminating the need for manual switching and maximizing energy savings. The fixture operates on 120–277V and is suitable for a wide range of site and perimeter lighting applications. It is designed for easy installation, with universal mounting options for wall, arm, or pole applications.



Built-in Photocell

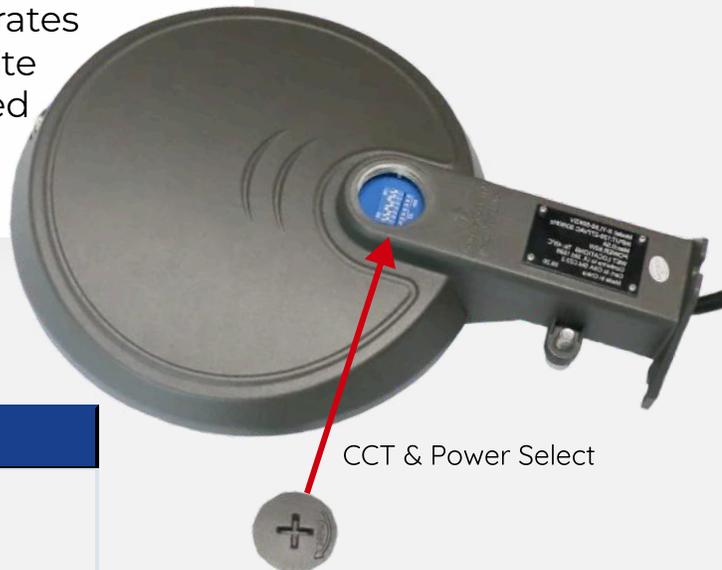

CCT & Power Select

Ordering Information

Example: ALS-DTD-35/50/65W-3/4/5K-BZ

MODEL	Wattage
ALS-DTD	35/50/65W-3/4/5K-BZ



Job Name: _____

Type: _____


Part #: _____

Notes: _____

General Specifications

Lumens per Watt	130 Lm/w	Total Lumens	4,550/6,500/8,450 Lm
AC Input	AC 120-277V	Housing Material	Die-Cast Aluminum
Finish	Bronze	Lens Type	Poly Carbonate
Dimming	0-10V Dimmable	LED Chips	Lumileds
Color Temperature	3000K, 4000K, 5000K	Certifications	UL, DLC
CRI	≥70	IP Rating	IP66
Weight	3.5 Lbs	Dimensions	9.1" x 12.60" x 4.41"
Luminary Life	50,000 Hour Rated	Warranty	5 Years

Dimensions

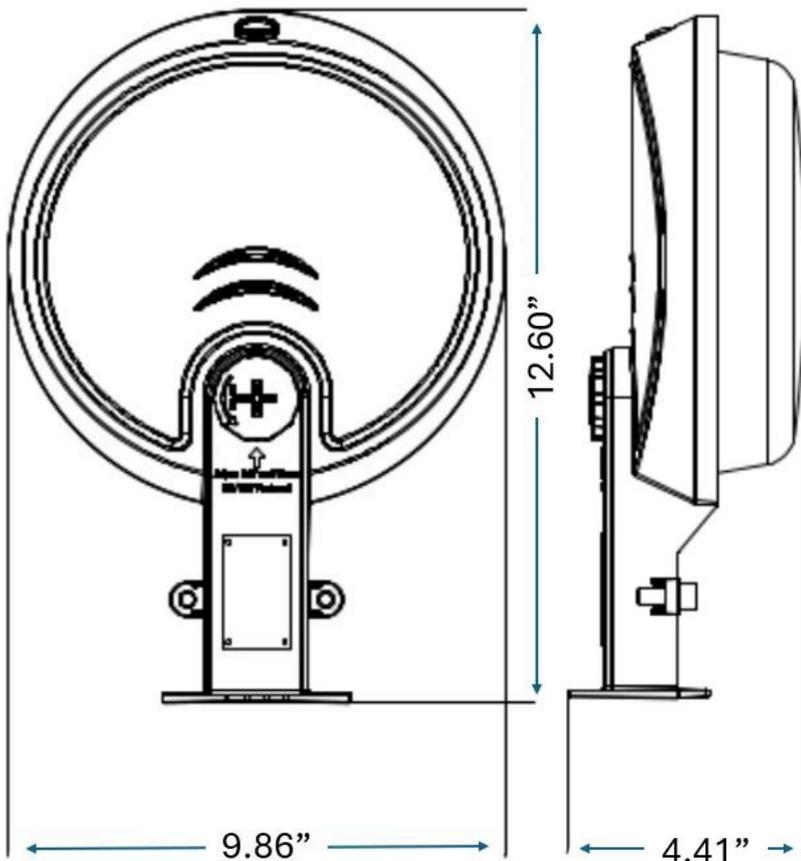

Applications






Job Name: _____

Type: _____

Part #: _____

Notes: _____

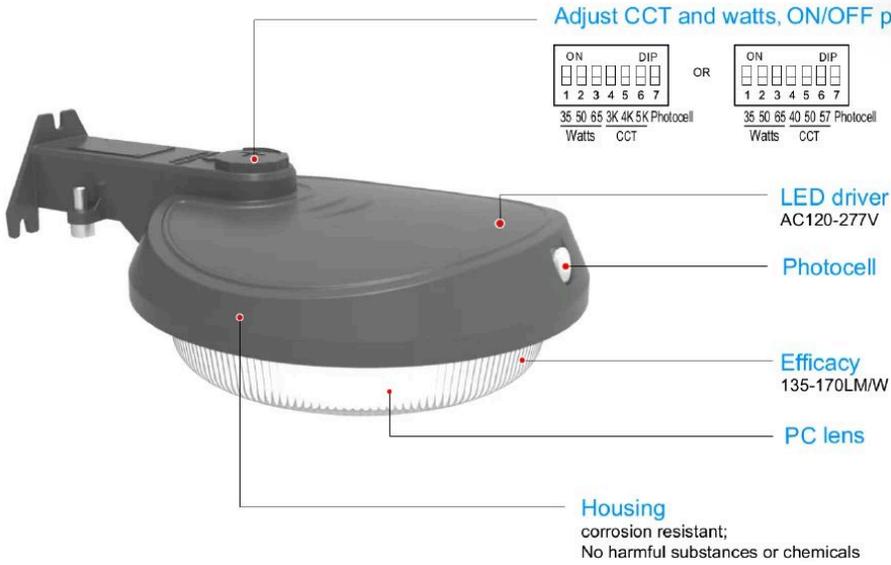

Pole Mount Hardware



Wall Mount Template

