



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# Color & Power SELECTABLE LED FLOOD LIGHT

15/20/30 ♦ 30/40/50 ♦ 60/80/100 WATTS  
with PHOTOCELL

Color and power selectable LED flood lights offer unmatched flexibility and adaptability, allowing on-site customization of brightness and color temperature to perfectly match any application. This makes them a versatile and efficient solution for distributors, installers, and end-users alike. These compact but powerful flood lights are a true innovation practically and aesthetically. With highly efficient LED engine and precise optical control, greater lighting performance adds the value to its exterior appearance. These LED lights have transformed the landscape lighting environment. Utilizing performance optic and long lasting driver, these lights will last for years to come.



## Ordering Information

Example: ALS-FLK5-30/40/50-3/4/5K-BZ

MODEL	Wattage
ALS-FLK5	15/20/30W-3/4/5K-BZ
	30/40/50-3/4/5K-BZ
	60/80/100-3/4/5K-BZ



### Mounting Options (part numbers for ordering)

ALS-FLK5-YOKE - Yoke Mount



ALS-FLK5-TRUNNION - Trunnion Mount  
(For 60/80/100-3/4/5K-BZ)





Job Name: \_\_\_\_\_

Type: \_\_\_\_\_


Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

### General Specifications

<b>Efficacy</b>	135 LPW	<b>Power Factor</b>	0.95
<b>Warranty</b>	5 Year Limited	<b>Life Span</b>	Rated over 50,000 hours
<b>CRI</b>	Ra>80	<b>Distribution</b>	7HX6V
<b>Dimming</b>	0-10V Vdc	<b>Color Temperature</b>	3000k, 4000k, 5000K
<b>AC Input</b>	AC 120-277V	<b>Certifications</b>	UL, DLC
<b>Working Temperature</b>	-40°F~113°F	<b>Storage Temperature</b>	-40°F~176°F
<b>Outdoor Rating</b>	Wet location/IP65	<b>Cable</b>	5 core,18AWG 0.3m

### Dimensions

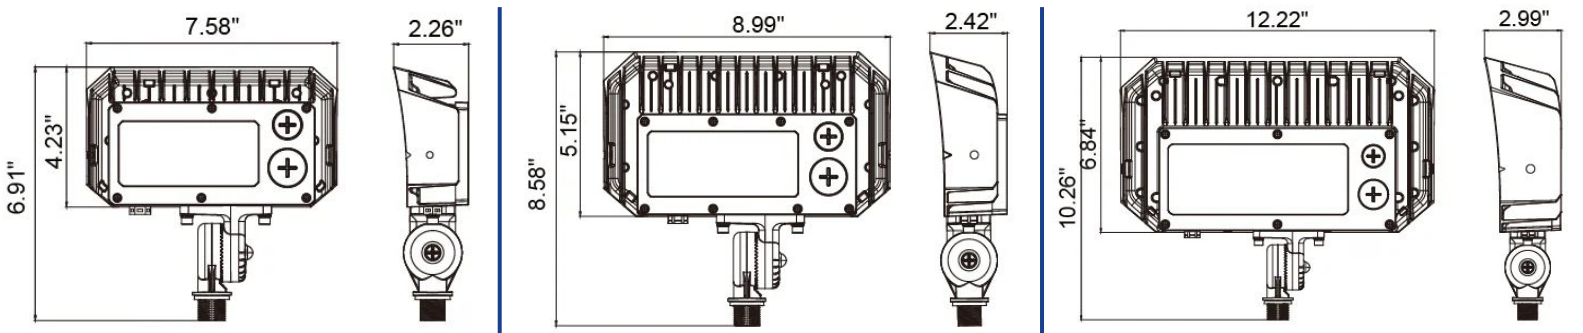

# ALS-FLK5-15/20/30W-3/4/5K-BZ

# ALS-FLK5-30/40/50W-3/4/5K-BZ

# ALS-FLK5-60/80/100W-3/4/5K-BZ

### Applications

