



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Color & Power SELECTABLE UFO Post Top Fixture

40/50/60, 60/80/100, 120/135/150 WATTS

This LED Post Top fixture with a "UFO" design aesthetic, which combines the modern circular, flat appearance with post-mount. Type V light distribution for symmetrical, 360° coverage—ideal for parking areas, plazas, walkways, and public spaces.

The bracket is foldable for compact shipping and easy handling, and installation is straightforward on standard 3" round poles (adapter available for 2-3/8" poles).

The "UFO" design helps ensure uniform light distribution across a wide area. They provide bright, clear, and consistent illumination without the dark spots or uneven lighting common with older systems.

They produce minimal heat and contain no hazardous materials like mercury, making them safer to handle and better for the environment.

Designed for outdoor use, they are built with durable, IP65-rated, die-cast aluminum housing to withstand harsh weather conditions, including rain, dust, and temperature extremes.



Ordering Information

Example: ALS-PTL-UFO-40/50/60W-3/4/5K-V-BZ

MODEL	Wattage
ALS-PTL-UFO	40/50/60W-3/4/5K-V-BZ 60/80/100W-3/4/5K-V-BZ 120/135/150W-3/4/5K-V-BZ

General Specifications

Housing Material	Aluminum	Finish	Bronze Powder Coat
Lumens per watt	130 LP/W	AC Input	AC 120-277V
Total Lumens	40/50/60W: 5200,6500,7800Lm 60/80/100W: 7800,10400,13000Lm 120/135/150W: 15,600/17550/19500Lm		
Dimming	0-10V	Color Temperature	3000k, 4000k, 5000K
Weight	12 lbs	LED Chips	Samsung
Certifications	UL, DLC	Lens Type	Type V
Outdoor Rating	Wet location/IP65	CRI	≥80
Warranty	5 Year Limited	Luminary Life	Rated over 50,000 hours





Job Name: _____

Type: _____

Part #: _____


Notes: _____

Dimensions

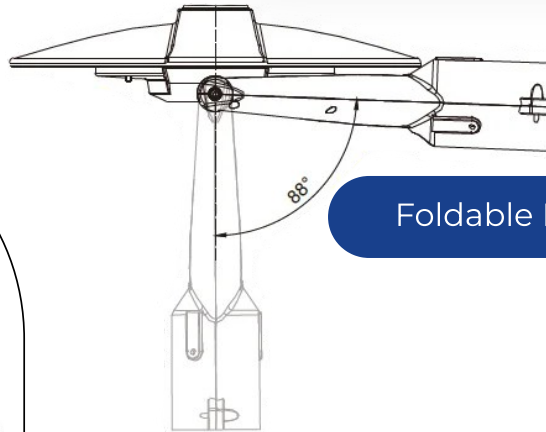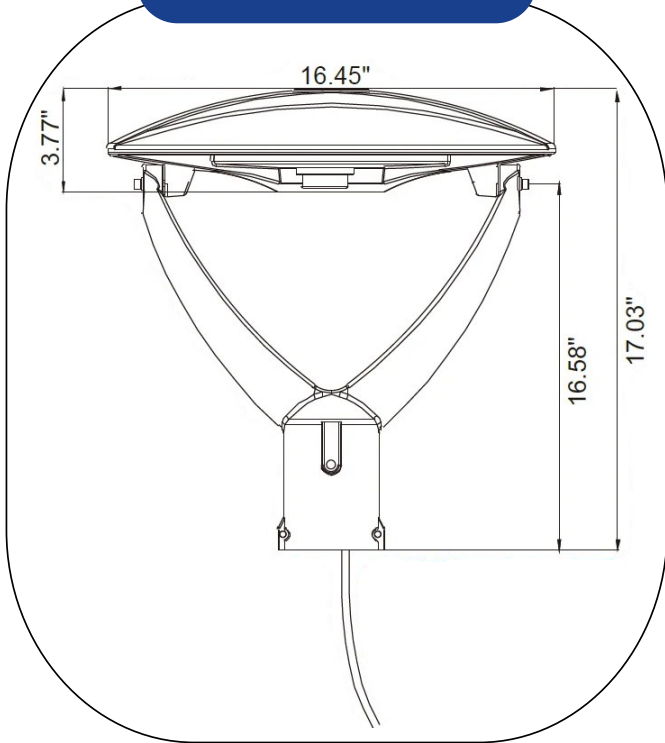

Foldable Bracket

CCT Select & Power Select

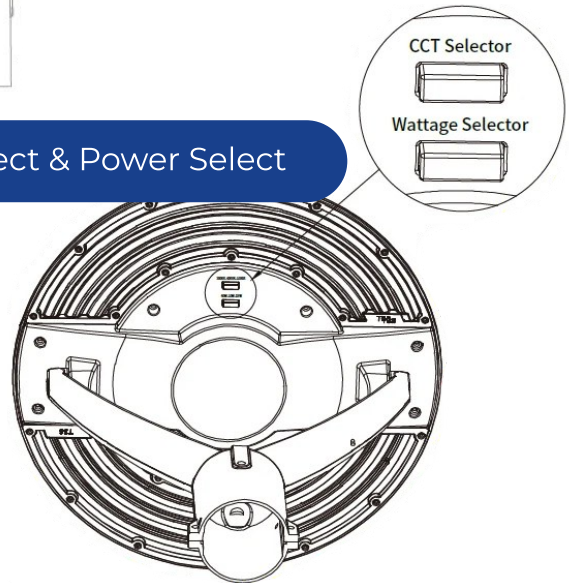

Applications

