



Job Name:

Type:

Part #:

Notes:

Color & Power **SELECTABLE**

Sleek **UFO** Post Top Fixture

63/53/33 & 125/105/76 WATTS

This Sleek Black LED UFO-Style Post Top Light combines modern styling with the performance, flexibility, and reliability electrical contractors and distributors demand for today's outdoor lighting projects. Designed to complement commercial, municipal, and campus environments, this fixture delivers efficient LED illumination while providing the versatility needed for both new construction and retrofit applications. Featuring field-selectable wattage (33/53/63W or 76/105/125W) and selectable color temperatures, a single fixture can be configured on-site to meet a variety of lighting requirements. This flexibility helps reduce inventory, simplifies project planning, and allows electrical contractors to adapt to changing jobsite conditions without replacing fixtures. Engineered for long-term outdoor performance, this fixture is IP65 rated for protection against dust and water ingress and includes an integrated photocell for automatic dusk-to-dawn operation, helping maximize energy savings while minimizing maintenance. Its durable construction is built to withstand demanding outdoor environments while providing dependable, consistent illumination year after year. Ideal for parking lots, roadways, drive lanes, pathways, campuses, parks, entrances, building perimeters, HOAs, and commercial landscape lighting, the LED UFO-Style Post Top Light delivers an attractive architectural appearance backed by the performance and reliability professionals expect.



Ordering Information

Example: ALS-PTL-UFO2-63/53/33W-3/4/5K-V-BK

| MODEL        | Wattage                                          |
|--------------|--------------------------------------------------|
| ALS-PTL-UFO2 | 63/53/33W-3/4/5K-V-BK<br>125/105/76W-3/4/5K-V-BK |



Shown with optional  
Glare Shield

#ALS-UFO2GS



Job Name:

Type:


Part #:

Notes:

General Specifications

|                  |                          |                   |                         |
|------------------|--------------------------|-------------------|-------------------------|
| Housing Material | Rugged Die-Cast Aluminum | Finish            | Black Powder Coat       |
| Lumens per watt  | 130 LP/W                 | AC Input          | AC 120-277V             |
| Dimming          | 0-10V                    | Color Temperature | 3000k, 4000k, 5000K     |
| Weight           | 12 lbs                   | LED Chips         | Samsung                 |
| Certifications   | UL, DLC                  | Lens Type         | Type V                  |
| Outdoor Rating   | Wet location/IP65        | CRI               | ≥70                     |
| Warranty         | 5 Year Limited           | Luminary Life     | Rated over 50,000 hours |

Easy CCT Select & Power Select

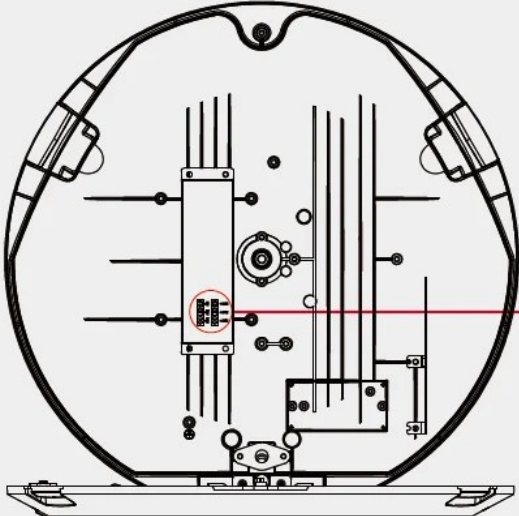



Power Setting

|                                  |                 |
|----------------------------------|-----------------|
| Power Selection                  | Default Setting |
| Adjust power between 63/53/33W   | 63W             |
| Adjust power between 125/105/76W | 125W            |

CCT Setting

Adjust CCT between 3000/4000/5000K, 5000K default setting.

Photometrics - Type V (standard)

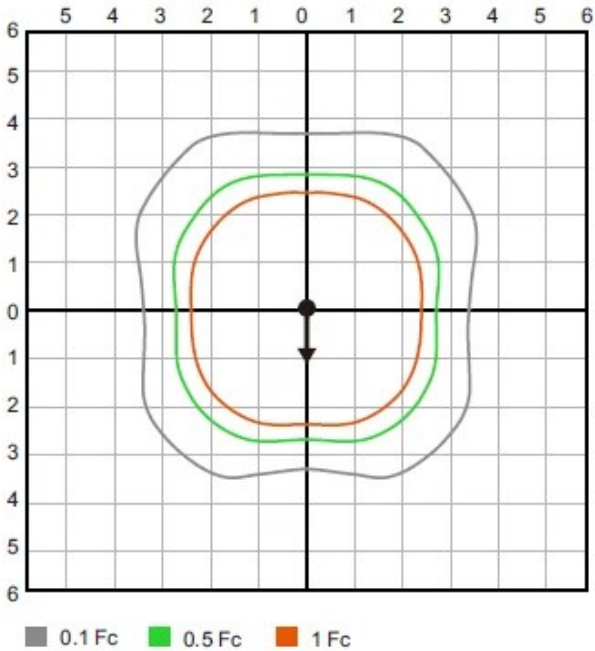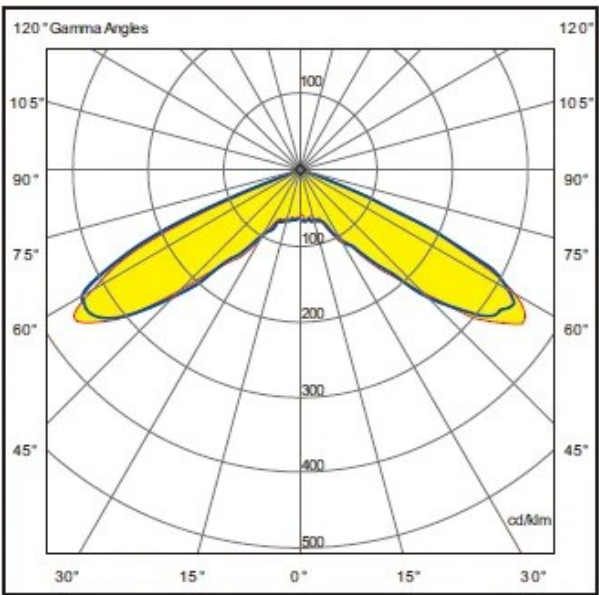






Job Name: \_\_\_\_\_

Type: \_\_\_\_\_


Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

### Dimensions

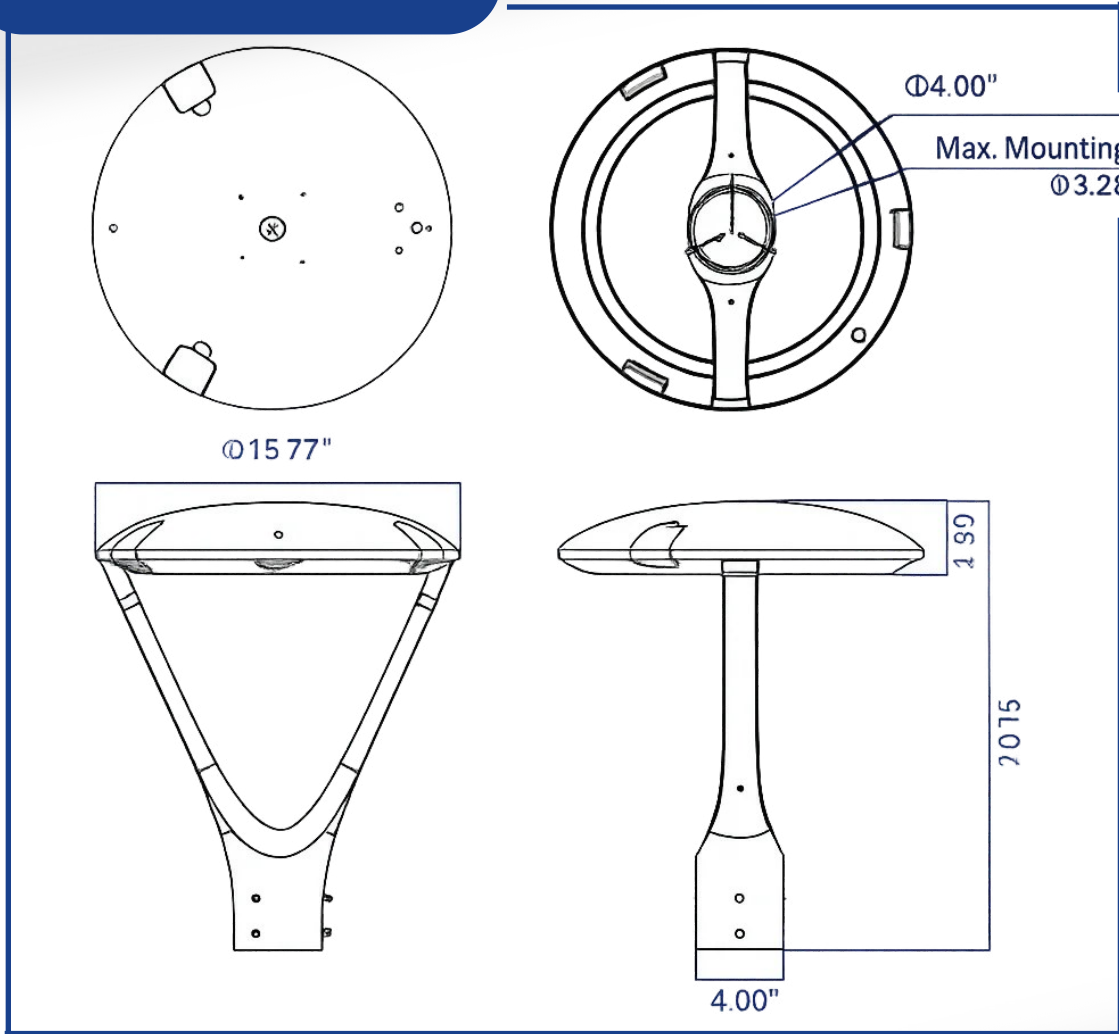

Glare Shield  
#ALS-UFO2GS

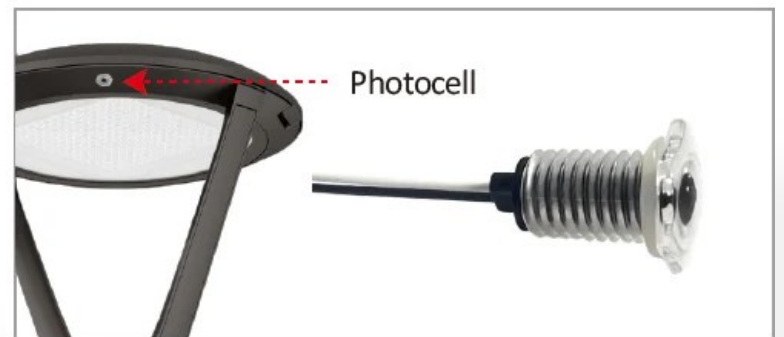

### Applications

