



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Color & Power SELECTABLE

WHITE LED ROUND HIGH BAY


150/100/80 WATTS

The White ALS-RHB9 UFO high bay with the ability to switch lumens and adjust CCT in one fixture, making it versatile enough to handle countless applications.

ALS-RHB9 provides 150lm/w, which will assure the brightness meets the applications on and provides the amount of light you want and need for your area.

Standard with 0-10V dimming, sensor port for quick plug and play sensor install.

The fixture is DLC ULC listed also compatible with NLC system. Emergency battery back-up is available. IP65 rated, suitable for commercial and industrial: warehouses and storage, industrial facilities, retail centers, manufacturing, sports facilities and Gymnasiums.

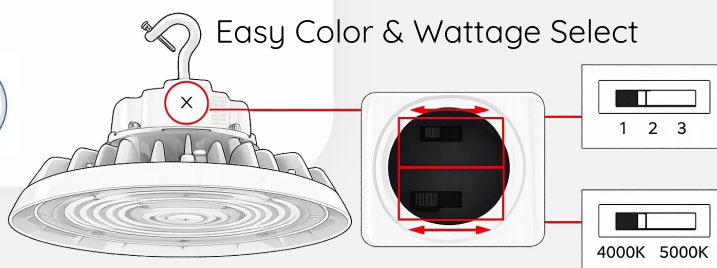

Ordering Information

Example: ALS-RHB9-150/100/80-4/5K-WH

MODEL	Wattage	Finish
ALS-RHB9	150/100/80-4/5K	WH - White

OPTIONS - Shown on page 2

ALS-HDO7VR-MH - Plug 'n Play PIR Sensor
ALS-HD06R - Remote Control
ALS-XUB-HBA-B - Small Size U Bracket
ALS-EMD-RHB-30W- Emergency Driver Backup



Job Name: _____

Type: _____

Part #: _____

Notes: _____

General Specifications

Construction:

- ♦ Die-casting aluminum housing and heatsink for added durability.

Electrical:

- ♦ 0-10V dimmable driver. Which can dim from 100% down to off.
- ♦ Input voltage 120-277V, and 50/60Hz.
- ♦ Designed to withstand surges of up to L/N-PE:6kV
- ♦ Flicker-free
- ♦ 5ft (59") long power and 1ft (12") long dimming cord provided for easier installation.

Optics:

- ♦ Selectable CCT 4000K or 5000K (Default setting), CRI >80.
- ♦ Three distributions are available, Narrow, Medium (Standard) and Wide.

Finish:

- ♦ White

Mounting:

- ♦ It comes standard with the G hook. The O hook, U bracket, and 3/4" NPS Threaded Pendant mount adapter are available. Safety hanging kit is standard.

Ambient Temperature::

- ♦ -40°F (-40°C) to 122°F (50°C)


Compliances:

- ♦ cULus listed for wet locations, max ambient temperature rating 45°C
- ♦ DLC®(DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Warranty:

- ♦ 5-year limited warranty.

OPTIONS

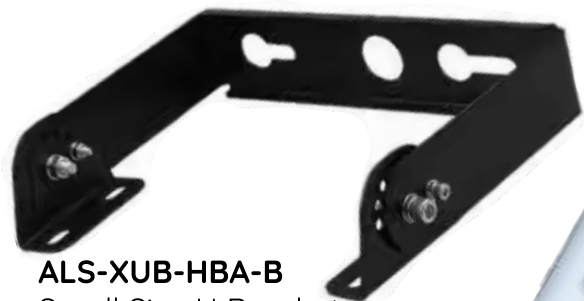

ALS-XUB-HBA-B
Small Size U Bracket



ALS-HD06R
Remote Control



ALS-HD07VR
Plug 'n Play PIR Sensor
(Motion Sensor)



ALS-EMD-RHB-30W
Emergency
Driver Backup



Job Name: _____




Type: _____

Part #: _____

Notes: _____

Dimensions

Shown with the different mounting options

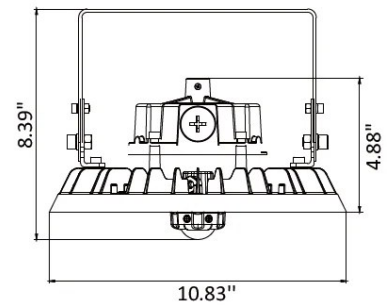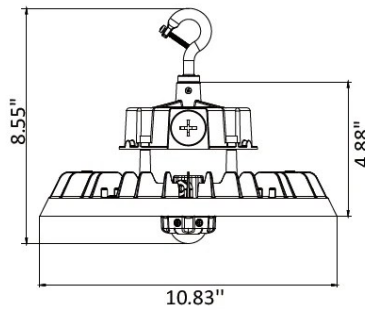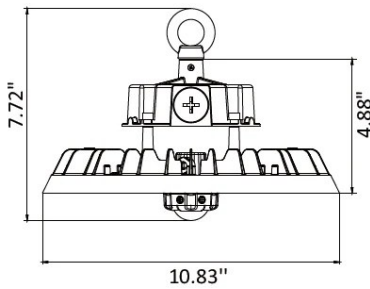

Applications

