


# LED AREA LIGHTS

**100W, 150W, 200W, 240W, 300W, 400W & 500W**



This area light features outstanding photometric performance, uniform illumination, low-profile design, high efficacy, long lifespan, and easy installation. The one piece die-cast aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. Ideal for use in various commercial environments, such as auto dealerships, parking lots, walkways, roadways, campuses, facade lighting, grocery stores and other public areas.

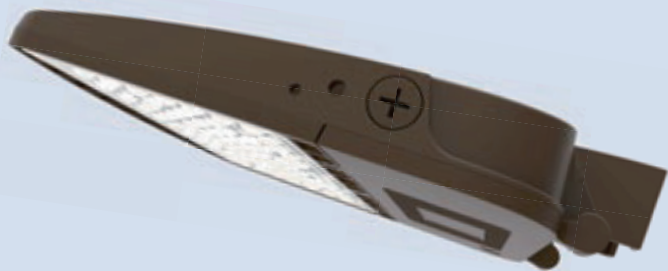

## Product Features

1. High efficiency LED Driver, the wide range input voltage 120-277VAC
2. Lumileds LED high luminous efficiency and long life.
3. Cast Aluminum Alloy design, better cooling and easy replacement, light quality, LEDTj<185°F.
4. Excellent optical design, greatly improve the light utilization and evenness.
5. Photocell Control Available (Optional).
6. 0-10V dimming.




For use with either




## Product Dimensions


**100W & 150W**

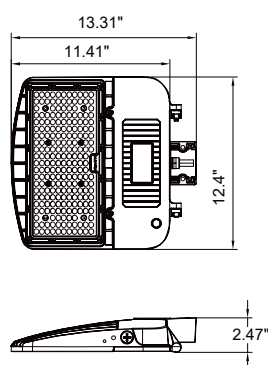


**200W**

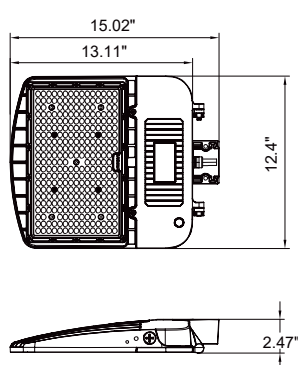

**240W & 300W**

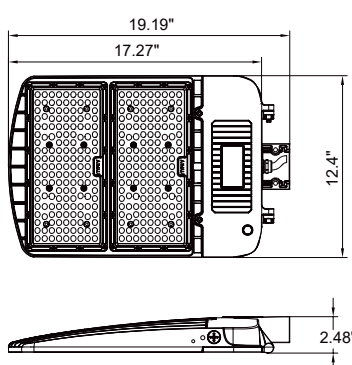

**400W & 500W**

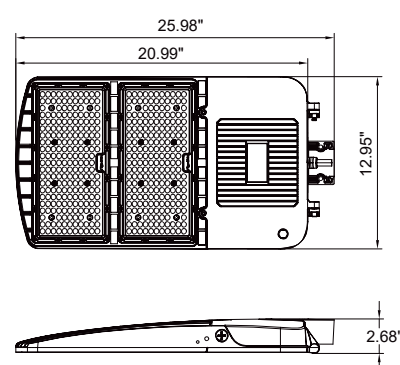




Job Name:
Type:
Part #:
Notes:

# Lighting Parameters

5000K

Model	Wattage	Voltage	Total Lumens	Efficacy	CCT	Weight	Dimensions
ALS-SB-P2-100W-5K-III-BZ	100W		15,000lm	150lm/w	5000K	12lbs.	13.31" x 12.4" x 2.47"
ALS-SB-P2-150W-5K-III-BZ	150W		22,500lm	150lm/w	5000K	9lbs.	13.31" x 12.4" x 2.47"
ALS-SB-P2-200W-5K-III-BZ	200W	120-277V	30,000lm	150lm/w	5000K	10lbs.	15.02" x 12.4" x 2.47"
ALS-SB-P2-240W-5K-III-BZ	240W		36,000lm	150lm/w	5000K	11lbs.	19.19" x 12.4" x 2.48"
ALS-SB-P2-300W-5K-III-BZ	300W		45,000lm	150lm/w	5000K	12lbs.	19.19" x 12.4" x 2.48"
ALS-SB-P2-400W-5K-III-BZ	400W		60,000lm	150lm/w	5000K	21lbs.	25.98" x 12.95" x 2.68"
ALS-SB-P2-500W-5K-III-BZ	500W		65,000lm	150lm/w	5000K	23lbs.	25.98" x 12.95" x 2.68"

New Revolution, No Cover Plate, No Socket Base, No Shorting Cap

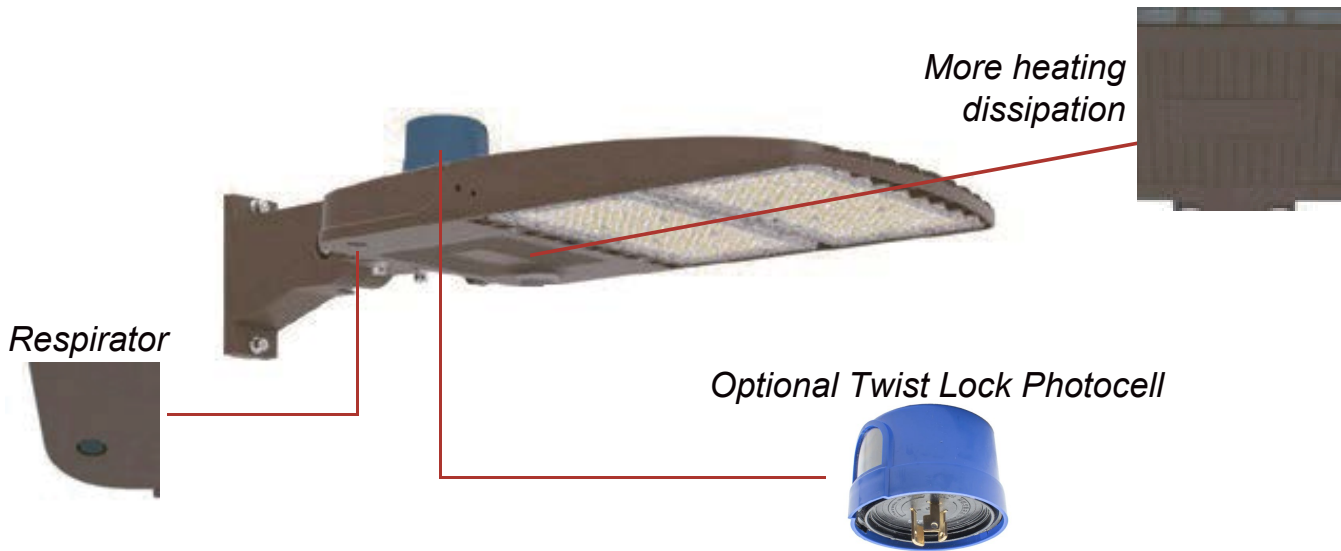

# Applications

