



Job Name: _____

Type: _____

Part #: _____

Notes: _____

4ft Color & PowerSELECTABLE LED Slim Vapor Proof Light 25/30/35/40/50 WATTS

The **ALS-VPL-4FT-5XW-5CCT-D** is a high-performance, field-selectable vapor tight LED fixture engineered for harsh environments where moisture, dust, and light chemical exposure are concerns. This tri-proof light offers selectable output—set wattage to 25W, 30W, 35W, 40W, or 50W and choose from **five color temperatures** (3500K, 4000K, 5000K, 5700K, 6500K) via onboard switches, providing unmatched flexibility for warehouses, parking garages, food plants, cold storage, and more.

Built with a rugged, corrosion-resistant housing and a high-transmittance polycarbonate lens, the fixture delivers up to **6,250** lumens (at 50W, 125 lm/W) with uniform, glare-free illumination. The integrated photoelectric separation design enhances heat dissipation, supporting an LED lifespan of 50,000+ hours. Rated IP65, the IND-VPL-4FT-5XW-5CCT-D is fully protected against water and dust ingress, ensuring reliable operation in wet and demanding environments. Installation is fast and versatile with both ceiling bracket and suspension options. The fixture's integrated design reduces wiring time by over 50%, and reserved screw holes in the clamps provide added shock resistance. Suitable for operation in temperatures from -40°C to 45°C (-40°F to 113°F). Certified for wet locations and backed by a 5-year warranty, this vapor tight is a smart, durable solution for any demanding site.



Ordering Information

Example: ALS-VPL-4FT-5XW-5CCT-D



MODEL	Wattage
ALS-VPL	4FT-5XW-5CCT-D



Job Name: _____

Type: _____


Part #: _____

Notes: _____

General Specifications

Wattage	25/30/35/40/50W	Lumens per Watt	125 Lm/w
Color Temperature	3500K/4000K/5000K/5700K/6500K	Total Lumens	3,125-6,250 Lm
AC Input	AC 120-277V	Housing Material	Die-Cast Aluminum
Finish	Gray	Lens Type	Poly Carbonate Frosted
Dimming	0-10V Dimmable	LED Chips	SMD2835
CRI	≥80	IP Rating	IP65
Driver	NA	Certifications	UL, DLC
Weight	4.8 Lbs	Dimensions	47.55" x 9.33" x 10.78"
Luminary Life	50,000 Hour Rated	Warranty	5 Years

Dimensions

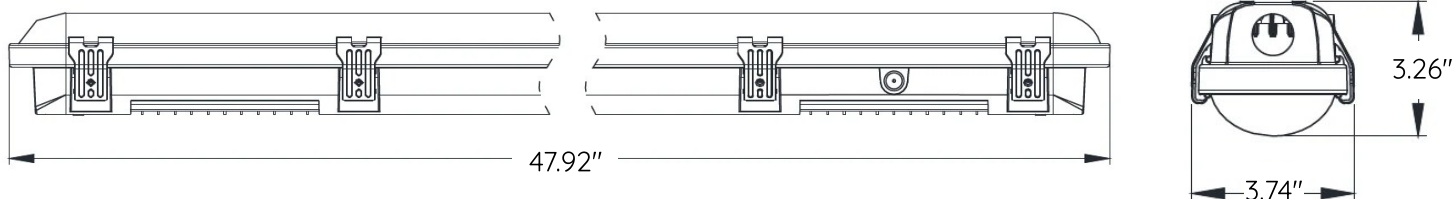

Applications

