



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Color & Power SELECTABLE LOW PROFILE WALL PACK

30/40/50 ♦ 60/80/100 WATTS

with PHOTOCELL



This low-profile, color, and wattage selectable LED wall pack fixture offers significant versatility and efficiency benefits, making it an ideal solution for various outdoor lighting applications. Field-adjustable wattage settings provide flexibility to optimize lumen output based on the precise requirements of the location, ensuring adequate illumination while maximizing energy savings. The selectable color temperature (CCT) allows users to choose the ideal light appearance to match specific environmental needs or preferences. A built-in photocell provides automatic dusk-to-dawn operation, reducing manual intervention and energy waste. All power, CCT, and sensor switches are conveniently located on the side of the fixture for fast, tool-free setup.



Ordering Information

Example: ALS-WPLP-30/40/60-3/4/5K-BZ-PC

MODEL	Wattage	CCT	Color	Photocell
ALS-WPLP	30/40/60W 80/100/120W	3/4/5K	BZ WH	PC





Job Name: _____

Type: _____

Part #: _____

Notes: _____

Dimensions

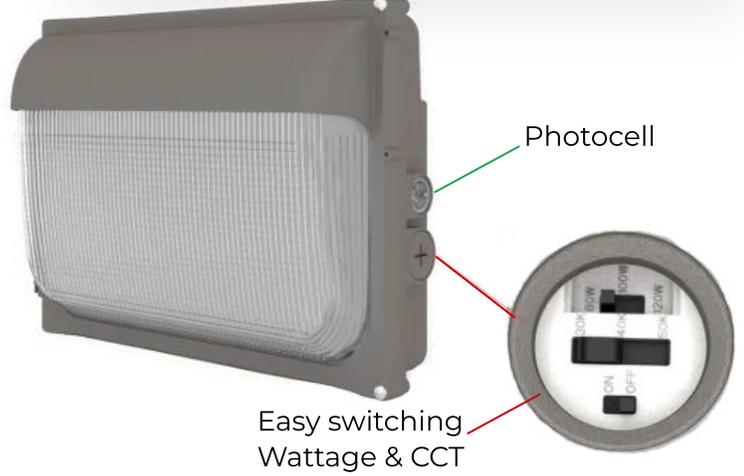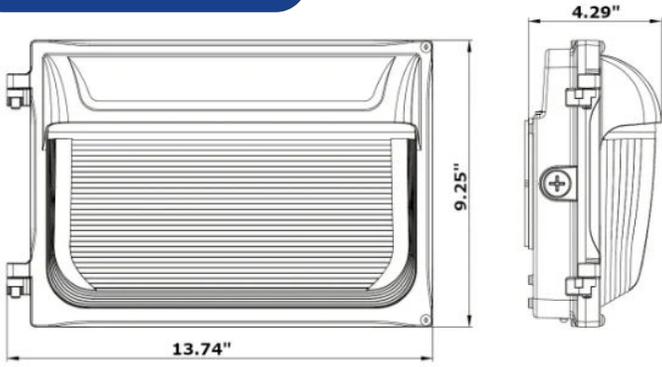

General Specifications

Housing Material	Aluminum Alloy	Finish	Dark Bronze or White Powder Coat
Warranty	5 Year Limited	Luminary Life	50,000 Hour Rated
Lumens per Watt 30/40/60W-3/4/5K	130 Lm/w	Total Lumens 30/40/60W-3/4/5K	3,900/5,200/7,800Lm
80/100/120W-3/4/5K	130 Lm/w	80/100/120W-3/4/5K	10,400/13,000/15,600Lm
Metal Halide Equivalent 30/40/60W-3/4/5K	Replaces up to 240W	Weight 30/40/60W-3/4/5K	9.19 lbs.
80/100/120W-3/4/5K	Replaces up to 400W	80/100/120W-3/4/5K	10.19 lbs.
Dimensions	13.74" x 4.29" x 9.25"	Driver	UL Listed
LED Chips	Philips Lumileds 3030	CRI	≥70Ra
Dimming	0-10V Dimmable	Color Temperature	3000k, 4000k, 5000K
AC Input	AC 120-277V	IP Rating	IP65
Certifications	UL, DLC 5.1 Premium	Lens Type	Prismatic Glass

Applications

