AMERICAN LIGHTING SYSTEMS™

Job Name:

Type:

Part #:

Notes:


Color & Power SELECTABLE

ARCHITECTURAL 90° ROTATING WALL PACK

20/30/40 WATTS

with **PhotoCell**



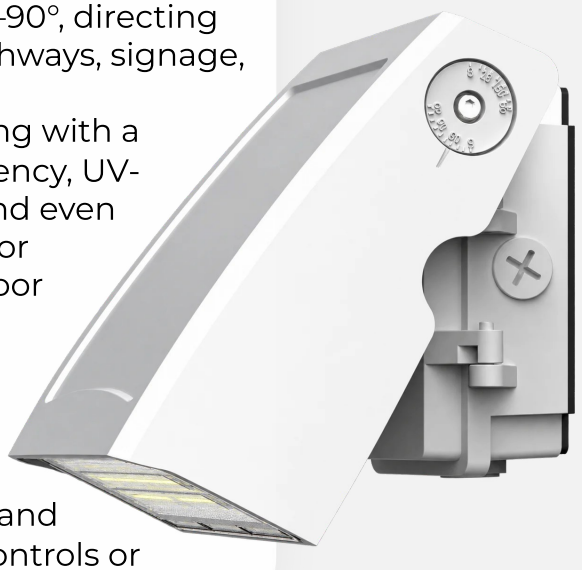

The ALS-WPR2-20/30/40W-3/4/5K is an adjustable, wattage and CCT-selectable architectural LED wall pack designed for precise exterior lighting on standard 120–277V service. Field-selectable switches let you set the fixture to 20W, 30W, or 40W and to 3000K, 4000K, or 5000K color temperature, so one SKU covers a wide range of architectural and security lighting needs. At its highest setting, the 40W mode delivers up to 5,200 lumens (130 lm/W). The 30W and 20W settings provide approximately 3,900 lumens and 2,600 lumens respectively. The adjustable head allows you to tilt the fixture from 0–90°, directing light exactly where it's needed—ideal for entryways, pathways, signage, and building facades.

The fixture features a rugged, die-cast aluminum housing with a bronze or white powder coat finish and a high-transparency, UV-stabilized polycarbonate lens for maximum durability and even light output. The housing is fully sealed and rated IP65 for wet locations, ensuring reliable performance in all outdoor commercial or industrial environments.

A built-in photocell provides automatic dusk-to-dawn operation, reducing manual intervention and energy waste. All power, CCT, and sensor switches are conveniently located for fast, tool-free setup. The high-efficiency LED driver operates on 120–277VAC, 50/60 Hz and supports 0–10V dimming for integration with lighting controls or building automation systems.

Ordering Information

DLC LISTED PREMIUM · UL CERTIFIED · 5 YEAR WARRANTY · WATTAGE SELECTABLE · CCT SELECTABLE · 0-10V DIMMING · WET LOCATION

Example: ALS-WPR2-20/30/40W-3/4/5K-BZ-PC

MODEL	Wattage	Finish	Photocell
ALS-WPR2	**20/30/40W-3/4/5K**	**BZ** - Bronze **WH** - White	**PC**

AMERICAN LIGHTING SYSTEMS™

Job Name:

Type:


Part #:


Notes:

General Specifications


Lumens per Watt	130 Lm/w	**Total Lumens**	2,600/3,900/5,200Lm
AC Input	AC 120-277V	**Housing Material**	Aluminum Alloy
Powder-Coat Finish	Bronze or White	**Lens Type**	UV-resistant Type II
Dimming	0-10V Dimmable	**LED Chips**	Philips Lumileds 3030
Color Temperature	3000K, 4000K, 5000K	**Certifications**	DLC, ETL
Driver	WEIPENG Power	**Metal Halide Equivalent**	Replaces up to 175W
CRI	≥70	**IP Rating**	65
Weight	3.28Lbs	**Dimensions**	7.55"x6.50"x5.27"
Luminary Life	50,000 Hour Rated	**Warranty**	5 Years


Dimensions

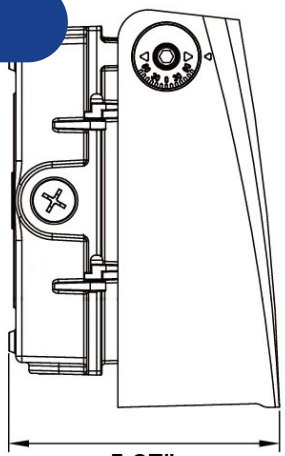


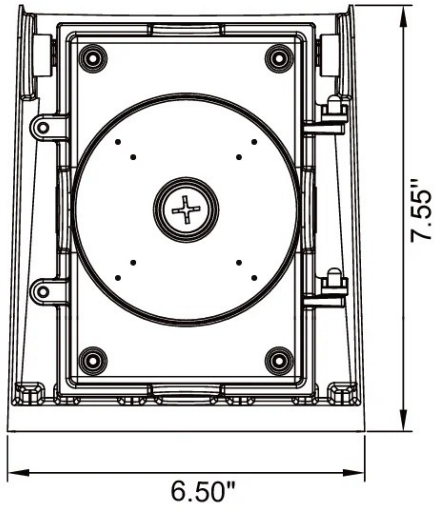


Photometrics

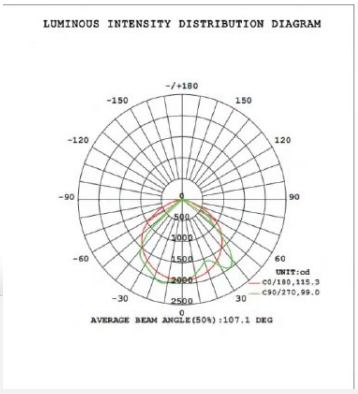

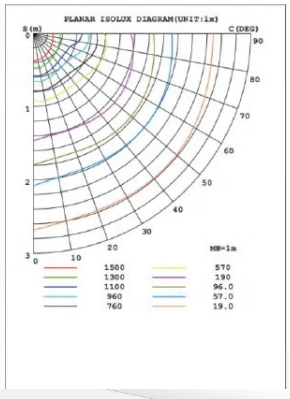

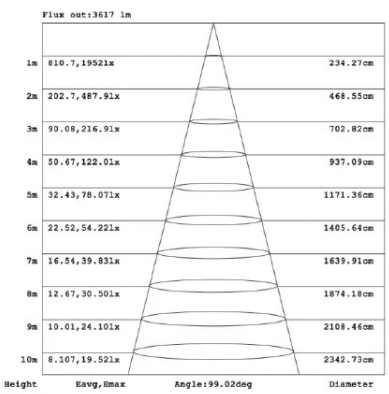

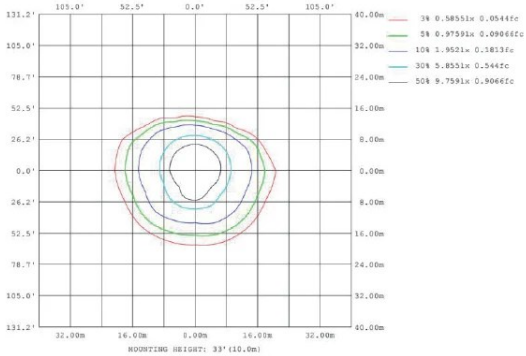

AMERICAN LIGHTING SYSTEMS™

Job Name:


Type:

Part #:


Notes:

Shown at Full 90°





Color & Wattage Select

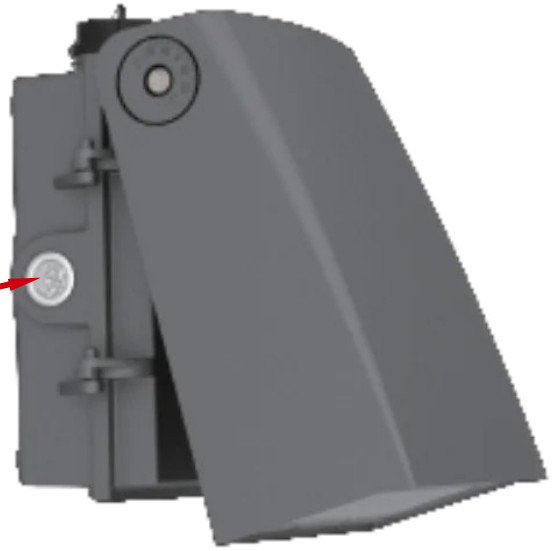

Photocell

Applications

